
MeQLab Flexible RF Modeling Platform

Introduction

MeQLab is a flexible device modeling platform supporting Windows, Linux and UNIX operation systems with its cross-OS software. Benefiting from its open architecture and buildin NanoSpice simulator, MeQLab is capable of providing users with a convenient, powerful, and customizable RF device modeling platform, applicable from parameter extraction to data de-embedding and characterization. It supports smooth conversion from baseband modeling cards to RF modeling cards, DC characteristics verification, RF model parameter extraction, model library generation and QA, providing customers with professional all-inone solutions for verification of various RF device models. MeQLab's unique RF device modeling solutions also feature the full capability up to 110GHz in handling RF raw data measurement and parameter transformation.

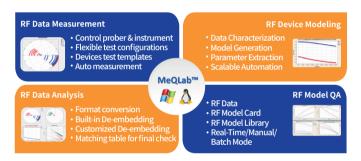

Key Advantages

• All-in-one

Full capability from testing, characterization, parameter extraction to QA for I-V, S-parameters and NF50 thermal noise

Open and Flexible

Open API supporting data processing, parameter extraction flow, model validation, and sub-circuit model topology customization, etc.

Comprehensive

RF modeling for MOS, inductor, capacitor, and III-V devices (HEMT, HBT, etc.)

- Multiple OS Windows Linux and U
- Windows, Linux and UNIX operating systems
 Fast Simulation
 Built-in SPICE engine for fast RE characterization and optimize
- Built-in SPICE engine for fast RF characterization and optimization • Automatic Extraction
- RF parameters & Global model

Applications

- RF device small signal testing
- RF model parameter extraction & optimization
- RF model development for new devices
- RF model QA verification


Specifications



- Real-time fitting criteria monitoring
- Professional RF automation extraction
- Efficient tabular of fine-tuned RF parameters
- Supports smooth conversion from baseband to RF models
- Advanced RF modeling and parameter extraction interface
- User-friendly RF fitting graphic selection and transformation
- Supports mainstream prober and meters for RF measurement
- Customizable open architecture and build-in parallel SPICE engine
- Fully integrated RF characterization charts including DC verification
- Fast and accurate RF simulation powered by built-in NanoSpice simulator
- Coefficients auto-extraction to scalable equation with RF modeling parameters

Application Examples

RF characterization and modeling



RF model library QA in batch mode



at area = 0 Lth Bastor = 0					
	Frenat		Path		
hib are	Marine New York		B Reglah dawn 115		
				B Peglab dawn 11b are	
- 6	Compare - Select proj	ects			
	S # 81 3				
	Redes	64	Corner	Custon	
	10 h Devices	192)	(2)	197	
	Madfal - 19805	540	(2)	120	
njet	And and plat				
	Manfat - 2805	585	580	185	
	and publication	580	58	585	
	10 de binde	540	(2)	120	
	Sector	520	(2)	N N N	
	Septis .	(92)	(2)	120	
	III JA NJT - PHP	50	590	80	
	9 pag	80	12	190	
				N N N N	
	Corps.	520	50	58	
	II de Bestator	90	(2)	180	
	Area	56	140	10	
	10 de Capaciter	560	190	195	
	~ + + + + + + + + + + + + + + + + + + +	120	121	120	